

INVESTIGATING THE BENEFITS OF PROJECTION HEAD FOR REPRESENTATION LEARNING

Yihao Xue, Eric Gan, Jiayi Ni, Siddharth Joshi, Baharan Mirzasoleiman

Department of Computer Science,

University of California, Los Angeles

yihaoxue@g.ucla.edu, egan8@g.ucla.edu, nijiyai1119626@g.ucla.edu,

sjoshi804@cs.ucla.edu, baharan@cs.ucla.edu

ABSTRACT

An effective technique for obtaining high-quality representations is adding a projection head on top of the encoder during training, then discarding it and using the pre-projection representations. Despite its proven practical effectiveness, the reason behind the success of this technique is poorly understood. The pre-projection representations are not directly optimized by the loss function, raising the question: what makes them better? In this work, we provide a rigorous theoretical answer to this question. We start by examining linear models trained with self-supervised contrastive loss. We reveal that the implicit bias of training algorithms leads to layer-wise progressive feature weighting, where features become increasingly unequal as we go deeper into the layers. Consequently, lower layers tend to have more normalized and less specialized representations. We theoretically characterize scenarios where such representations are more beneficial, highlighting the intricate interplay between data augmentation and input features. Additionally, we demonstrate that introducing non-linearity into the network allows lower layers to learn features that are completely absent in higher layers. Finally, we show how this mechanism improves the robustness in supervised contrastive learning and supervised learning. We empirically validate our results through various experiments on CIFAR-10/100, UrbanCars and shifted versions of ImageNet. We also introduce a potential alternative to projection head, which offers a more interpretable and controllable design.

1 INTRODUCTION

Representation learning has been the subject of extensive study in the last decade (Chen et al., 2020; Zbontar et al., 2021; Khosla et al., 2020; Ermolov et al., 2021). Despite the great progress, learning representations that generalize well across various domains has remained challenging. Among the existing techniques, contrastive self-supervised learning has gained a lot of attention, due to its ability to learn robust representations that generalize better across various domains. Contrastive learning (CL) learns representations by maximizing the agreement between different augmented views of the same examples and minimizing that of different examples (Chen et al., 2020). Pre-training with CL is often essential before transferring models to new or shifted domains (Hendrycks et al., 2019).

A key factor that enables contrastive learning to learn robust representations is *projection head*, a shallow MLP that is used during pretraining and is discarded afterwards (Chen et al., 2020), which has become a standard for learning high-quality representations (He et al., 2020; Yen et al., 2022; Bardes et al., 2022; Chuang et al., 2020; Grill et al., 2020; Garrido et al., 2022; Zbontar et al., 2021; Ermolov et al., 2021; Joshi & Mirzasoleiman, 2023). It is particularly advantageous when there is a misalignment between training and downstream objectives (Bordes et al., 2023). The benefit of projection head extends beyond self-supervised learning to other representation learning methods, including supervised contrastive learning (Khosla et al., 2020). However, the mechanism by which the projection head improves the generalizability and robustness of representations is poorly understood.

Theoretically analyzing the effect of projection head for CL is challenging, as one needs to understand feature learning both before and after the projection head and compare them. A few recent studies (Tian et al., 2021; Wang et al., 2021; Wen & Li, 2022) have focused on non-contrastive self-supervised methods and demonstrated that the projection head can mitigate the dimensional collapse problem, where all inputs are mapped to the same representation. However, such results

do not extend to contrastive methods due to its inherently different learning mechanism. Besides, they do not provide an understanding of the projection head’s role in enhancing robustness under misalignment between pretraining and downstream objectives.

In this work, we analyze the effect of projection head on the quality and robustness of representations learned by CL, and extend our results to supervised CL (SCL) and supervised learning (SL). First, we theoretically show that linear models progressively assign weights to features as they operate through the layers. Thus, in deeper layers the features are represented more unequally and the representations are more specialized toward the pretraining objective. Moreover, non-linear activations exacerbate this effect allowing lower layers to learn features that are entirely absent in the outputs of the projection head. We demonstrate that projection head provably improves the robustness and generalizability of the representations, when data augmentation harms useful features of the pretraining data, or when features relevant to the downstream task are too weak or too strong in the pretraining data. Finally, we extend our results beyond CL to SCL and SL. In this setting, we reveal that lower layers can learn subclass-level features that are not represented in the final layer, demonstrating how representations before the final representation layer can significantly reduce class/neural collapse, a problem previously observed in the final representations.

We conduct extensive experiments to confirm our theoretical analysis. First, we construct a semi-synthetic dataset by adding MNIST (LeCun, 1998) digits to CIFAR10 (Krizhevsky et al., 2009) images, and confirm that using projection head yields superior representations when data augmentation harms the downstream-relevant features, or when these features are either very strong or very weak during pretraining. Then, we study supervised learning and demonstrate that using projection head results in better course-to-fine transferability on CIFAR100, superior performance of few-shot adaption to distribution shift on UrbanCars (Li et al., 2023), and better robustness against natural distribution shifts in ImageNet (Xiao et al., 2020; Hendrycks et al., 2021a,b). We also demonstrate how a fixed reweighting head can achieve performance comparable to the projection head, providing further evidence for our theoretical conclusions and potentially inspiring future design.

2 ADDITIONAL RELATED WORK

Projection head. While projection head is widely used, the underlying reasons for its benefit have not been fully understood. The empirical study by Bordes et al. (2023) suggests that the benefit of the projection head is influenced by optimization, data, and downstream task, and is especially significant when there is a misalignment between the training and downstream tasks. On the theoretical side, Jing et al. (2021) suggests that projection head can alleviate dimensional collapse, but did not provide insights into the significant role of the projection head in cases of misalignment between pretraining and downstream tasks. Recently, Gui et al. (2023) analyzed the training of a linear projection head using CL. However, their analysis is performed in the case where representations are fixed, and the results only show how training a linear head on these representations can lead to worse post-projection representations. This does not align with practical scenarios where encoder and projection are trained simultaneously and does not reveal why adding a projection head is needed in the first place.

Generalizability and transferability of representations. A longstanding goal in machine learning is to acquire representations that generalize and transfer across various tasks. Two key challenges emerge in this pursuit. The first arises from shifts in labels between training and downstream tasks. Notably, the issue of class or neural collapse (Papayan et al., 2020; Han et al., 2021; Zhu et al., 2021; Zhou et al., 2022b;a; Lu & Steinerberger, 2022; Fang et al., 2021; Hui et al., 2022; Chen et al., 2022; Graf et al., 2021; Xue et al., 2023), affecting both SCL and SL, where representations within the same class become indistinguishable at a subclass level, rendering them unfit for fine-grained labeling. We theoretically demonstrate that such issue can be alleviated by taking the pre-projection head representations. The second challenge arises from shifts in input distributions, where neural networks rely heavily on patterns specific to the training distribution that do not generalize (Zhu et al., 2016; Geirhos et al., 2018; Ilyas et al., 2019; Barbu et al., 2019; Recht et al., 2019; Sagawa et al., 2019; 2020; Xiao et al., 2020; Taori et al., 2020; Koh et al., 2021; Shankar et al., 2021). We explore the benefits of projection head in the above two scenarios, but noting that our primary focus lies in elucidating the broader concepts at play rather than addressing each specific problem.

3 EXPLORING THE ROLE OF PROJECTION HEAD IN SELF-SUPERVISED CL

In this section we consider self-supervised contrastive learning, a scenario where the concept of the projection head is frequently employed and has a crucial role in achieving optimal performance.

Pretraining data distribution. We define the following data distribution and data augmentation used for pretraining with contrastive learning. We choose this setting for clarity in presenting our results, but we note that our results can be generalized to more complex cases.

Definition 3.1 (Input distribution of pretraining data). *The input data used for pretraining follows distribution \mathcal{D} , where, for an input $\mathbf{x} \in \mathbb{R}^d$, its i -th element is randomly drawn from $\{-\phi_i, \phi_i\}$.*

Definition 3.2 (Data augmentation). *Given an input \mathbf{x} , its augmentation follows the distribution $\mathcal{A}(\mathbf{x})$. The augmentation operates on an input \mathbf{x} in two steps. First, for each i , with probability α_i , it alters i -th element in \mathbf{x} by randomizing its sign, resulting in a modified input denoted by \mathbf{x}' . Then, a random noise $\boldsymbol{\xi}$ satisfying $\mathbb{E}[\boldsymbol{\xi}] = \mathbf{0}$ and $\mathbb{E}[\boldsymbol{\xi}\boldsymbol{\xi}^\top] = \sigma^2\mathbf{I}$ is added to \mathbf{x}' , yielding augmentation $\mathbf{x}' + \boldsymbol{\xi}$. Each coordinate of the input is an independent feature. At a high level, ϕ_i represents the magnitude of a feature in the input data, while α_i quantifies the level of disruption introduced by the augmentation. If $\alpha_i = 1$, it means that this feature is completely ‘destroyed’ during augmentation, such that there is no correlation between a positive pair (two augmented versions of the same input) at this coordinate. This data augmentation is designed to mimic practical scenarios where data augmentation techniques intentionally modify different features to varying degrees. For example, some features, like color and texture, may be altered more significantly than core features of the main object. Additionally, the noise $\boldsymbol{\xi}$ with variance σ^2 at each coordinate is included because data augmentation used in practice unintentionally introduces certain level of noise.*

Model. We consider 2-layer linear and non-linear models for the sake of clarity, as it suffices to demonstrate our main findings, although our results generalize to multiple layers. Given an input $\mathbf{x} \in \mathbb{R}^d$, the output after the l -th layer is denoted as $f_l(\mathbf{x})$, with $f_2(\mathbf{x}) = h(f_1(\mathbf{x}))$. We will consider linear and non-linear functions for $f_1(\cdot)$ and $h(\cdot)$ in our analysis. The second layer $h(\cdot)$ serves as the projection head and the first layer $f_1(\cdot)$ serves as the encoder.

Contrastive loss. We consider the following spectral loss, which has been widely used in previous theoretical and empirical studies (HaoChen et al., 2021; Xue et al., 2022; Saunshi et al., 2022; HaoChen & Ma, 2022; Garrido et al., 2022; Xue et al., 2023). Given a model representing function $f(\cdot)$, the loss is $\mathcal{L}_{CL}(f) = -2\mathbb{E}_{\mathbf{x} \sim \mathcal{D}, \mathbf{x}_1^+ \sim \mathcal{A}(\mathbf{x}), \mathbf{x}_2^+ \sim \mathcal{A}(\mathbf{x})} [f(\mathbf{x}_1^+)^\top f(\mathbf{x}_2^+)] + \mathbb{E}_{\mathbf{x}_1 \sim \mathcal{D}, \mathbf{x}_2 \sim \mathcal{D}} [(f(\mathcal{A}(\mathbf{x}_1)))^\top f(\mathcal{A}(\mathbf{x}_2))]^2$.

After training a model to minimize this loss, we utilize it in *downstream tasks* where we feed different inputs, which may or may not follow the same distribution as the pretraining data, into the model. We can leverage the *representations* provided by the model for various purposes, most commonly to train a linear model on these representations and predict labels for the downstream data. When we use the two-layer model, i.e., when $\mathcal{L}_{CL}(f_2)$ is minimized, we have the option to choose either the post-projection representations generated by $f_2(\cdot)$ or the pre-projection representations from $f_1(\cdot)$ for the downstream task.

Clarification on what we compare. To gain a comprehensive understanding, it’s necessary to compare these three cases: (1) *pre-projection*, where we minimize $\mathcal{L}_{CL}(f_2)$ first and discard $h(\cdot)$, using only $f_1(\cdot)$ for the downstream task; (2) *post-projection*, where we minimize $\mathcal{L}_{CL}(f_2)$ and use $f_2(\cdot)$ for the downstream task; (3) *no-projection*, where we minimize $\mathcal{L}_{CL}(f_1)$ and using $f_1(\cdot)$ for the downstream task. The goal is to determine when *pre-projection* outperforms both of the other two and understand the reasons behind it. However, in practical deep neural networks, there is typically no significant difference between *no-projection* and *post-projection* as both scenarios use the network’s final output for the downstream task and the difference is mainly an additional layer in *post-projection*. Given that the networks are sufficiently large and expressive, this one-layer difference does not significantly change the representations achieved at the output. Therefore, in theory, we consider settings where $f_1(\cdot)$ and $f_2(\cdot)$ have the same expressiveness and yield equivalent representations when used to minimize the loss, and then solely comparing *pre-projection* and *post-projection* is sufficient.

3.1 LAYER-WISE PROGRESSIVE FEATURE WEIGHTING IN LINEAR MODELS

Linear network. We consider a linear model in which $f_2(\mathbf{x}) = \mathbf{W}_2 f_1(\mathbf{x}) = \mathbf{W}_2 \mathbf{W}_1 \mathbf{x}$, with $\mathbf{W}_1 \in \mathbb{R}^{p \times d}$ and $\mathbf{W}_2 \in \mathbb{R}^{p \times p}$ representing the weights of the first and second layers, respectively. Both the hidden and output dimensions are p , to ensure consistent dimensionality between pre-projection and post-projection representations for a fair comparison.

3.1.1 STRUCTURE OF LAYER WEIGHTS

We begin by examining the weights at different layers within a model. Our investigations reveals the relationship between these layer weights, which generally hold regardless of the data distribution.

Firstly, we consider the weights of the minimum norm minimizer of the CL loss. This is pertinent because gradient-based algorithms are shown to prefer minimizers with small norms (Neyshabur et al., 2014; Gunasekar et al., 2017). Furthermore, many theoretical studies on CL (Ji et al., 2021; Liu et al., 2021; Nakada et al., 2023) have considered regularization in the form of $\|\mathbf{W}^\top \mathbf{W}\|_F$, which promotes a small norm, and Xue et al. (2023) have shown that the minimum norm provides an explanation for many intriguing phenomena in CL.

Theorem 3.3 (Weights of the minimum norm minimizer). *The global minimizer of the CL loss \mathcal{L}_{CL} with the smallest norm, defined as $\|\mathbf{W}_1^\top \mathbf{W}_1\|_F^2 + \|\mathbf{W}_2^\top \mathbf{W}_2\|_F^2$, satisfies $\mathbf{W}_1 \mathbf{W}_1^\top = \mathbf{W}_2^\top \mathbf{W}_2$.*

In addition, we establish that a similar conclusion holds for models trained using gradient flow, which is a continuous version of gradient descent widely adopted in theoretical analysis. In gradient flow, at any time t , the weight updates are given by $\frac{d}{dt} \mathbf{W}_i^{(t)} = -\frac{\partial}{\partial \mathbf{W}_i^{(t)}} \mathcal{L}_{CL}(\mathbf{W}^{(t)})$, where $i = 1, 2$.

Theorem 3.4 (Weights of the model trained with gradient flow, proved in (Arora et al., 2018)). *Suppose the initialization satisfies $\mathbf{W}_1^{(0)} \mathbf{W}_1^{(0)\top} = \mathbf{W}_2^{(0)\top} \mathbf{W}_2^{(0)}$. Using gradient flow, at any time t , we have $\mathbf{W}_1^{(t)} \mathbf{W}_1^{(t)\top} = \mathbf{W}_2^{(t)\top} \mathbf{W}_2^{(t)}$.*

3.1.2 LAYER-WISE PROGRESSIVE FEATURE WEIGHTING

What insights can we gain from Theorems 3.3 and 3.4? Given that $\mathbf{W}_1 \mathbf{W}_1^\top = \mathbf{W}_2^\top \mathbf{W}_2$, both layers have the same singular values, and the left singular vectors of \mathbf{W}_1 match the right singular vectors of \mathbf{W}_2 . Consequently, the singular values of the joint weight matrix $\mathbf{W}_2 \mathbf{W}_1$ are the squares of those in the first layer, \mathbf{W}_1 . As a result, the differences in weights assigned to the features are smaller when the input is passed through the first layer than when the input is passed through the whole network. To illustrate this concept, we analyze the model trained on the data distribution given by Definition 3.1 and analyze the resulting representations.

The following analysis holds for both models obtained from either the minimum norm minimizer of the loss (as in Theorem 3.3) or the model trained using gradient flow under the assumption that the model converges to a global minimum (as in Theorem 3.4), as they are equivalent.

In our input data, we refer to the d independent coordinates as input features. Our interest lies in understanding the weight assigned to each feature in the pre- and post-projection representations. To achieve this, we examine the quantities $\|f_l(\mathbf{e}_i)\|$, $i = 1, \dots, d$, and $l = 1, 2$, with \mathbf{e}_i denoting i -th standard basis. These quantities represent the scale of the representation of a unit feature at each coordinate. The following theorem (see proof in Appendix A.2) shows the weights of the features in each layer:

Theorem 3.5. *Define $\beta_i := \frac{(1-\alpha_i)^2 \phi_i^2}{\phi_i^2 + \sigma^2}$ and $\gamma_i := \sqrt{\frac{(1-\alpha_i)\phi_i}{\phi_i^2 + \sigma^2}}$. Let $\Pi := (j_1, j_2, \dots, j_d)$ be a permutation of indices $\{1, 2, \dots, d\}$ such that $\beta_{j_1} \geq \dots \geq \beta_{j_d}$. Then after pretraining,*

$$\|f_l(\mathbf{e}_i)\| = \gamma_i^l \text{ if } i \in \{j_1, \dots, j_{\min\{d,p\}}\}, \text{ else } 0.$$

What does the model do? According to this theorem, the model follows two key steps: (1) Feature selection: The model selects the top p features with the highest β_i values, which experience a low level of disruption from augmentation (α_i) and/or have a large feature magnitude (ϕ_i). (2) Feature weighting: These selected features are scaled by γ_i at each layer, with zero weight assigned to the remaining features. The rescaling serves a dual purpose: (a) *moderating* the features by assigning small weights to either overly strong or overly weak features in terms of their magnitude, as indicated by $\gamma_i \rightarrow 0$ when ϕ_i approaches either 0 or $+\infty$; (b) giving larger weights to features that are less disrupted by augmentation.

The difference between $f_1(\cdot)$ and $f_2(\cdot)$. (1) Both learn the same features but assign different weights to them. (2) $f_1(\cdot)$ treats features more equally, exhibiting a smaller gap between feature weights.

3.1.3 WHY AND WHEN CAN MORE NORMALIZED FEATURES BENEFIT A DOWNSTREAM TASK?

To address this question, we analyze the representations of downstream data drawn from the following distribution: each input $\mathbf{x} \in \mathbb{R}^d$ is a vector, and its i -th element is independently drawn from the set $\{-\hat{\phi}_i, \hat{\phi}_i\}$. Note that $\hat{\phi}_i$'s may differ from ϕ_i 's, as in real-world scenarios, the input data in the downstream task may follow a different distribution than the pretraining inputs. Additionally, each input

\mathbf{x} is labeled as $\text{sign}(\mathbf{e}_{j^*}^\top \mathbf{x})$, where \mathbf{e}_{j^*} is the j^* -th standard basis vector. In simpler terms, the label is determined by the sign of the j^* -th coordinate of the input, that is the *downstream-relevant feature*.

To evaluate the informativeness of the learned representations for the downstream task, we input the data (without any data augmentation, as is typically the case in practice) into the model that has been pretrained with the CL objective. We then evaluate the quality of these representations at each layer by analyzing the sample complexity of the hard SVM trained with labels on these representations, which can be equivalently viewed as training a linear model with logistic losses using gradient descent Soudry et al. (2018). This aligns with the standard linear evaluation protocol in practice (Ye et al., 2019; Oord et al., 2018; Bachman et al., 2019; Kolesnikov et al., 2019; Chen et al., 2020). For a data distribution that is separable with a (γ, ρ) -margin (see details in Appendix A.3), it is well-known that the sample complexity only grows with $r = (\rho/\gamma)^2$, Bartlett & Shawe-Taylor (1999). Hence, we refer to r as the sample complexity indicator and compare its values for pre-projection and post-projection representations. The following theorem shows the conditions under which one has a higher sample complexity indicator than the other. Note that a smaller sample complexity is preferable.

Theorem 3.6. *Let r_1 and r_2 be the sample complexity indicators for pre-projection and post-projection representations, respectively. Define $\Delta := \sum_{1 \leq i \leq \min\{d, p\}} \text{and } j_i \neq j^* \hat{\phi}_{j_i}^2 \left(\frac{\gamma_{j_i}^2}{\gamma_{j^*}^2} - \frac{\gamma_{j_i}^4}{\gamma_{j^*}^4} \right)$. If $\Delta < 0$ then $r_1 < r_2$, and if $\Delta > 0$ then $r_1 > r_2$.*

Δ depends on the strength of the downstream-relevant feature and the weights of features. While determining Δ 's value may seem complex, in general, the key factor is whether the model assigns sufficient weight to the downstream-relevant feature. If this feature is underweighted by the model, using the first layer is beneficial. To better understand when this occurs, we provide the following interpretable examples

Corollary 3.7. *In each of the following examples $\Delta < 0$, i.e., the pre-projection representations are preferred. (1) **Data augmentation disrupts the useful feature too much.** Example: all features in both the pretraining and downstream data have a magnitude of 1, and α_{j^*} is the p -th smallest among all $\{\alpha\}_{i=1}^d$, indicating that the data augmentation disrupts useful feature the most among the p features that will be learned. (2) **The downstream-relevant feature is too weak in pretraining.** Example: all α_i 's are equal, $p \geq 2$, $\forall i \phi_i \leq \sigma$, and ϕ_{j^*} is the p -th largest among all $\{\phi_i\}_{i=1}^d$. (3) **Multiple features are selected by the model, with the downstream-relevant being too strong in pretraining.** Example: all α_i 's are equal, $p \geq 2$, $\forall i \neq j^* \phi_{j^*} > \max\{\phi_i, \sigma/\phi_i\}$.*

It might seem surprising to include scenario 3 above, as having a strong downstream-relevant feature in pretraining may be expected to benefit the downstream task. However, as we discussed after Theorem 3.5 the model moderates the features and assigns small weights to overly strong ones. This can potentially explain why the use of a projection head remains beneficial in cases where the pretraining task seems to be a good match for the downstream task. Furthermore, we will validate each of the above three observations in experiments in Section 5.1. We also provide a discussion on multi-layer models in Appendix B

3.2 LOWER LAYERS CAN LEARN MORE FEATURES THAN HIGHER LAYERS VIA NON-LINEARITY

In the previous section on linear models, it's worth noting that both layers select the same features, albeit with different weightings. Now, let's consider a scenario where augmentation disrupts the useful feature excessively, for example, when $p_{j^*} = 1$ such that the useful feature is assigned a weight of $\gamma_{j^*} = 0$. In such cases, neither layer would learn this feature. However, in this section, we'll explore an interesting aspect of non-linear models. Specifically, we'll demonstrate that pre-projection head representations can learn features that are weighted as zero in post-projection head representations.

For clarity, we will present our result in the simplest case, although it holds in broader scenarios. For the pretraining data, we let $d \geq 2$, and assume $\phi_1 = \phi_2 = 1, \sigma = 0$. Additionally, we set $p_2 = 1$ and $p_1 = 0$, meaning that the augmentation completely 'destroys' feature 2 while fully preserving feature 1. Consequently, during CL, the pretraining objective discourages the learning of feature 2.

Non-Linear diagonal network. We consider a diagonal non-linear network with

$$f_1(\mathbf{x}) = \sigma(\mathbf{w}_1 \odot \mathbf{x}, \mathbf{b}_1), \quad f_2(\mathbf{x}) = h(f_1(\mathbf{x})) = \sigma(\mathbf{w}_2 \odot f_1(\mathbf{x}), \mathbf{b}_2), \quad (1)$$

where $\mathbf{w}_1, \mathbf{w}_2, \mathbf{b}_1, \mathbf{b}_2 \in \mathbb{R}^d$ are the trainable weights and trainable biases, and $\sigma(\cdot, \cdot)$ represents the symmetrized ReLU activation function, defined as $\sigma(a, b) = \text{ReLU}(a - b) - \text{ReLU}(-a - b)$, applied

element-wise. In this model, each coordinate in the input is processed independently without any cross-coordinate connections. This design not only simplifies our analysis but also aligns with our definition where the features at all coordinates are independent. Because of this definition, there is no motivation for even a fully connected model to combine the features. Moreover, this model is sufficient for characterizing the feature selection and weighting processes described in the previous section, enabling us to understand the key aspects clearly. Our results derived with this model also extend to fully connected ReLU networks, as we will empirically demonstrate in Section 5.1

We train the model using gradient flow to minimize the contrastive loss $\mathcal{L}_{CL}(f_2)$. Interestingly, in the following theorem, where we compare the pre-projection and post-projection representations, we will observe that feature 2, which is discouraged from being learned during the pretraining process, has zero weight post-projection but a non-zero weight pre-projection.

Theorem 3.8. *If at initialization $\mathbf{w}_1^{(0)} = [w_{11}^{(0)} w_{12}^{(0)} \dots]^\top$, $\mathbf{w}_2^{(0)} = [w_{21}^{(0)} w_{22}^{(0)} \dots]^\top$, $\mathbf{b}_1^{(0)} = \mathbf{b}_2^{(0)} = [b^{(0)} b^{(0)} \dots]^\top$ with $|w_{22}^{(0)}| \leq \sqrt{b_0}$ and $|w_{22}^{(0)}|(|w_{12}^{(0)}| - b_0) \geq b_0$, then as $t \rightarrow \infty$, $\|f_2(\mathbf{e}_2)\| \rightarrow 0$, $\|f_1(\mathbf{e}_2)\| \geq \sqrt{b_0}$.*

The theorem indicates that pre-projection representations are more transferable. The ‘destroyed’ feature, feature 2, is weighted zero after the projection head but non-zero before the projection head. Therefore, using the first layer representations allows us to successfully learn downstream tasks where feature 2 is the downstream relevant feature, whereas we can’t do so with the second layer representations. In practice, augmentations are imperfect and may inadvertently distort important features. Additionally, there is no one-size-fits-all augmentation suitable for all downstream tasks. With non-linear models, the projection head can save us from losing valuable information.

We note that the above advantage of the pre-projection representation diminishes when we use weight decay. Indeed, we can show that $\|f_1(\mathbf{e}_2)\| \rightarrow 0$ in this case as weight decay tends to shrink the weights considered unnecessary for minimizing the loss. However, we note that in practical scenarios, weight decay values are often small, e.g., 10^{-6} , and training epochs are finite, e.g., 100, as the default setting in Chen et al. (2020). Therefore, we can estimate the effect as approximately $(1 - 10^{-6})^{100} \approx 1 - 10^{-4}$ for a weight that receives zero gradient from other sources, indicating a limited effect. Consequently, the benefit of pre-projection representations remains evident with reasonable weight decay. However, using excessive weight decay will essentially remove this benefit, as shown empirically in Section 5.1

4 HOW THE IDEA OF PROJECTION HEAD CAN BENEFIT SUPERVISED LEARNING

The idea of projection head has been adopted by supervised contrastive learning (Khosla et al., 2020), yet its effects have not been systematically studied nor theoretically explored. Here, we provide theoretical insights into its benefits in both supervised CL (SCL) and standard supervised learning (SL).

4.1 THE GENERAL INSIGHTS FROM LINEAR MODELS

The insights gained from Section 3.1 can be carried over to understand the case of supervised learning as well. The conclusion in Theorem 3.4 actually holds in more generality. In fact, when employing a multi-layer linear model represented as $f(\mathbf{x}) = \mathbf{W}_L \mathbf{W}_{L-1} \dots \mathbf{W}_1 \mathbf{x}$ to minimize any loss function via gradient flow with initialization $\mathbf{W}_l(0)^\top \mathbf{W}_l(0) = \mathbf{W}_{l+1}(0) \mathbf{W}_{l+1}(0)^\top$, one can derive a conclusion in the form of $\mathbf{W}_l(t)^\top \mathbf{W}_l(t) = \mathbf{W}_{l+1}(t) \mathbf{W}_{l+1}(t)^\top$, the proof of this relationship can be found in Arora et al. (2018). The singular values of the matrix represented by the model grow exponentially as we go deeper, making the model more specialized toward the pretraining task. Therefore, when considering cutting off at lower layers, it leads to more generalizable and less specialized representations. This is particularly beneficial when the target matrix \mathbf{W}^* , determined by the training data to be represented by the model using $\mathbf{W}_L \dots \mathbf{W}_1$, doesn’t adequately weight features that are important for downstream tasks.

4.2 ALLEVIATING CLASS COLLAPSE AND NEURAL COLLAPSE IN NON-LINEAR MODELS

When considering representations’ transferability, a crucial aspect is their utility for finer-grained downstream tasks (e.g., distinguishing dog breeds) compared to the pretraining task (e.g., distinguishing dogs from cats). In both SCL and standard supervised learning, a common challenge arises, where representations within each class become indistinguishable at a finer-grained level. This is known as class collapse in SCL (Chen et al., 2022; Graf et al., 2021; Xue et al., 2023) and neural collapse in standard SL (Papayan et al. (2020); Han et al. (2021); Zhu et al. (2021); Zhou et al. (2022b); Lu & Steinerberger (2022); Fang et al. (2021); Hui et al. (2022)).

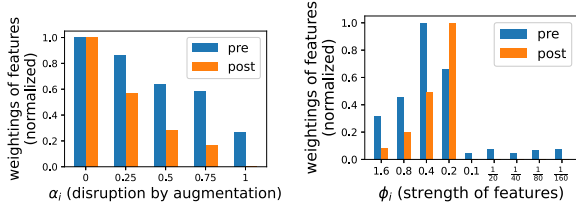


Figure 1: Weights of features in a two-layer fully connected ReLU network trained with CL. **Left:** With all features having equal strength, those that are more disrupted by augmentation have smaller/zero weights. **Right:** With augmentation treating all features equally, features with the largest/smallest strength are weighted less compared to those with intermediate strength. In both **right** and **left**, weights are more equal pre-projection.

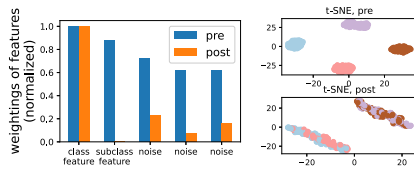


Figure 2: **Left:** Weights of features in a two-layer fully connected ReLU network trained using SCL. The subclass feature is not represented post-projection but is represented pre-projection. **Right:** As a result, the four subclasses are only separable in pre-projection representations.

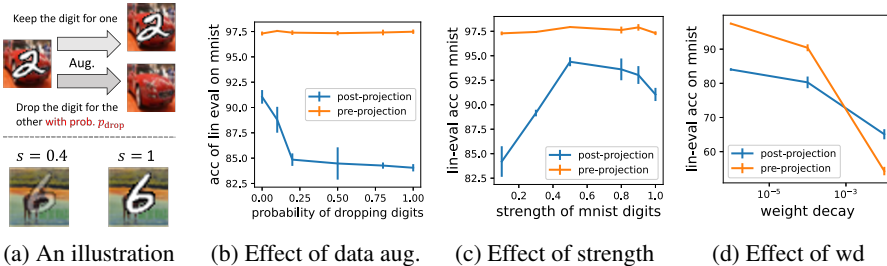


Figure 3: Results on MNIST-on-CIFAR-10. (a) The data augmentation keeps the digit for one image in the positive pair and randomly drops the digit for the other with a probability p_{drop} . Pre-projection is more beneficial (b) with more inappropriate augmentation (large p_{drop}) during pretraining, (c) when digits are very weak/strong during pretraining, and (d) when weight decay is smaller.

Interestingly, we show that lower layers can learn subclass-level features not represented in the final layer in supervised learning, suggesting that using and then discarding the projection head can mitigate the issue of class/neural collapse. To theoretically characterize this, we consider the following data distribution.

Definition 4.1. We have four subclasses represented by (y, y_{sub}) , where $y \in \{1, -1\}$ is the class label, and $y_{sub} \in \{1, -1\}$. For each input vector $\mathbf{x} \in \mathbb{R}^d$ in subclass (y, y_{sub}) , $\mathbf{x} = [y \ y_{sub} \ \dots]^\top$ with the other coordinates being independent and symmetrically distributed.

We consider training the non-linear diagonal network defined in Equation 1 on the above data distribution. For supervised CL, we consider the following spectral loss, which a natural generalization from that for self-supervised (\mathcal{L}_{CL}) (HaoChen et al., 2021; Xue et al., 2022; Saunshi et al., 2022; HaoChen & Ma, 2022; Garrido et al., 2022; Xue et al., 2023).

$$\mathcal{L}_{SCL}(f_2) = -2\mathbb{E}_{\mathbf{x}, \mathbf{x}^+ \sim \text{the same class}} [f_2(\mathbf{x})^\top f_2(\mathbf{x}^+)] + \mathbb{E}_{\mathbf{x}, \mathbf{x}^- \text{ independently drawn}} [(f_2(\mathbf{x})^\top f_2(\mathbf{x}^-))]^2.$$

For standard supervised learning, we consider the Mean Squared Error (MSE) loss. Since the network’s output $f_2(\mathbf{x})$ is d -dimensional, we map it to a scalar by adding a linear layer with all weights set to 1. Let $\mathbf{1} \in \mathbb{R}^d$ be a vector with all elements equal to 1, then the loss can be written as:

$$\mathcal{L}_{SL}(f_2) = \mathbb{E}_{(\mathbf{x}, y)} (f_2(\mathbf{x})^\top \mathbf{1} - y)^2.$$

According to Definition 4.1, we can use $\|f_i(\mathbf{e}_1)\|$ and $\|f_i(\mathbf{e}_2)\|$ to determine the model’s weighting of the class feature and the subclass feature, respectively, in the i -th layer representations. Next theorem demonstrates that the features indicating subclasses are learned pre-projection but not post-projection.

Theorem 4.2. Under the same assumption about initialization as in Theorem 3.8, and $w_{12}^{(0)} w_{22}^{(0)} > 0$, for either the model trained to minimize $\mathcal{L}_{SCL}(f_2)$ or $\mathcal{L}_{SL}(f_2)$ with gradient flow, as $t \rightarrow \infty$, $\|f_2(\mathbf{e}_2)\| \rightarrow 0$, $\|f_1(\mathbf{e}_2)\| \geq \sqrt{b_0}$.

5 EXPERIMENTS

5.1 CONTROLLED EXPERIMENTS ON SELF-SUPERVISED CL

The empirical benefits of the projection head are already well-established, and evidence can be found in numerous large-scale experiments. Instead, in this subsection, we focus on controlled

proof-of-concept experiments, allowing us to see the underlying mechanisms that are not shown in existing works and validate our theoretical results from Section 3.

Synthetic data. We train a two-layer ReLU network on data drawn from the distribution defined in Definition 3.1 with the second ReLU layer serving as the projection head. The network is randomly initialized. More details are in Appendix C.1. We conduct experiments in two settings. (1) In setting 1, we let all five features have equal strength and let the augmentation disrupts features differently, with feature 1 perfectly preserved and feature 5 completely randomized. Figure 1 left shows the weights assigned to features at pre- and post-projection. Consistent with the conclusion from Theorem 3.5, features disrupted more by data augmentation are assigned smaller weights. However, these features are weighted more equally pre-projection. Notably, feature 5 has zero weight post-projection but non-zero weights pre-projection, aligning with the finding in Theorem 3.8. (2) In setting 2, we aim to demonstrate the moderating effect reflected in Theorem 3.5. We let α_i 's be equal, controlling the factor of data augmentation, then plot the weights of features with different strength in Figure 1 right. Features being either too strong or too weak are weighted less than intermediate strength features, but in pre-projection, they are less underweighted compared to post-projection.

MNIST-on-CIFAR-10. We design the following dataset for pretraining, with the downstream task on the original MNIST. The *pretraining dataset* is based on CIFAR-10, where each image combines a CIFAR-10 image with a MNIST digit. Specifically, the pixel values within the digit area are calculated as $(1-s) \times \text{CIFAR-10 image} + s \times \text{MNIST digit}$, while the values outside this area remain unchanged as in the CIFAR-10 image. Here s controls the strength of the downstream-relevant feature (MNIST digits) during pretraining. We use the following *data augmentation* during pretraining. For each positive pair, we keep one image's digit, while dropping the other's digit with probability p_{drop} . A larger p_{drop} means that the augmentation disrupts the downstream-relevant feature more. See Figure 3a for an illustration. The *downstream task* is classification on the original MNIST dataset. We feed MNIST digits to the pretrained model and train a linear classifier on representations. We pretrain ResNet-18s with one-hidden-layer MLP as the projection head using the popular SimCLR loss (Chen et al., 2020) with varying s and p_{drop} and report the evaluation results in Figure 3.

Figure 3b shows the downstream accuracy against p_{drop} with $s = 1$. Pre-projection representations outperform post-projection representations, and the gap widens as p_{drop} increases. This confirms that inappropriate augmentations can significantly amplify the superiority of pre-projection representations, aligning with Corollary 3.7. Figure 3c shows the downstream accuracy against s , the strength of digits, with $p_{drop} = 0$. While the pre-projection accuracy barely changes, the post-projection accuracy increases and decreases, as s increases, making the benefit of using pre-projection more pronounced when either the digit is too weak or too strong, aligning with Corollary 3.7. Figure 3d with $p_{drop} = 1$ demonstrates the impact of weight decay. Larger weight decay diminishes the benefits of pre-projection representations, aligning with our discussion in Section 3.2, and can even turn them into a detriment. However, pre-projection remains superior with reasonable weight decay.

In Appendix D.1, we present two additional experiments involving minimally modified CIFAR-10 images to further support our conclusions. We also discuss the effect of early stopping in Appendix D.2.

5.2 PROJECTION HEAD IN SUPERVISED LEARNING

We present the following experiments showing broader implications of projection head in SCL and SL.

Coarse-to-fine transferability on synthetic data. We consider the data distribution in Definition 4.1. A two-layer ReLU network is trained from random initialization on such data. Figure 2 visualizes the weight assigned to each input component by the model (left) and the representations (right) at each layer. Consistent with the conclusion from Theorem 4.2, we observe that the subclass feature is assigned a weight of zero post-projection but has a non-zero weight pre-projection. As a result, pre-projection representations do not suffer from class collapse, making them more transferable.

Coarse-to-fine transferability on CIFAR-100. We pretrain a ResNet-18s on CIFAR-100 with 20 coarse-grained labels and conducted linear evaluation on representations using both these 20 labels and 100 fine-grained labels, separately (details in Appendix C.1). The results

Table 1: The pre-projection reps. suffer less from class/neural collapse, allowing for better fine-grained classification.

	coarse		fine	
	pre	post	pre	post
SCL	55.2 \pm 0.4	53.6 \pm 0.1	36.0 \pm 0.1	25.7 \pm 0.7
SL	53.1 \pm 0.3	53.2 \pm 0.7	33.7 \pm 0.3	29.7 \pm 0.3

Table 2: The fixed reweighting head can yield improvements comparable to those of the trainable projection head. For the distribution shift scenario, we report the average test accuracies for 2, 4, 8, 16, 32, 64, and 128 shots adaption. More detailed results are in Appendix C.2

Scenario	Dataset	Alg.	Performance Measure	Performance		
				vanilla	proj	reweight
synthetic	M-on-C	SSCL	digit clf. acc.	77.0	97.3	97.3
coarse-to-fine	CIFAR100	SCL	fine-grained clf. acc.	21.8	36.0	30.2
coarse-to-fine	CIFAR100	SL	fine-grained clf. acc.	31.44	33.7	32.2
distribution shift	UrbanCars	SL	few-shot adaption acc.	82.2	86.1	87.0

are compared in Table 1. Pre-projection representations yield higher accuracy in general, but with the benefit much more significant in the fine-grained downstream task. This emphasizes that pre-projection representations are less susceptible to class/neural collapse, resulting in more distinguishable representations within each pretraining class.

Few-shot adaption to distribution shift on UrbanCars. Subpopulation shift typically involves scenarios where some data groups are underrepresented in the source domain but well-represented in the target domain. Recent works have demonstrated the effectiveness of retraining the final linear layer using target data to adapt to distribution shifts (Rosenfeld et al. (2022); Kirichenko et al. (2022); Mehta et al. (2022)). However, it has been shown that this approach leads to suboptimal results when the target data for training the linear layer is scarce (Chen et al. (2023)). This could be attributed to the suboptimal quality of penultimate representations. Here, in Figure 4, we demonstrate that by applying the projection head technique and performing adaption on pre-projection representations can lead to better performance. The details are provided in the Appendix C.1. We also present experiments on shifted ImageNets in Appendix D.3




Figure 4: Performance of few-shot adaption.

6 REPLACING THE PROJECTION HEAD WITH A FIXED REWEIGHTING HEAD

Based on the observations above, we now explore an alternative design that employs a fixed reweighting head instead of a trainable projection head. Let $\mathbf{r} = [r_1, \dots, r_p]^\top$ be the representation output by the encoder. The reweighting head $h_{\text{rw}}(\cdot)$ acts as $h_{\text{rw}}(\mathbf{r}) = [r_1, \frac{1}{\kappa}r_2, \dots, \frac{1}{\kappa^{p-1}}r_p]^\top$, where $\kappa > 1$ is a hyperparameter. This mimics the role of the projection head described earlier. During pretraining, the reweighting head unequally weight features by assigning different weights to the dimensions of representations, with κ controlling how unequal they are. This allows the encoder before the head to weight input features more equally. Note that with a slightly large κ , dimensions at the end will be almost ‘turned off’ after the head, which can result in representations after the head representing fewer features than before. This mimics the effect discussed for non-linear models in Sections 3 and 4. We evaluate this approach in the scenarios from Sec. 5.2 and demonstrate that the fixed reweighting head can achieve improvements comparable to those of the projection head, as shown in Table 2. This has two implications: (1) it serves as further evidence for our theoretical conclusions in Sections 3 and 4, indicating that the reweighting effect accounts for all or most of the improvements achieved by the projection head. (2) it opens up possibilities for designing more straightforward and interpretable alternatives to the projection head. It would be interesting for future work to explore the effects of making κ trainable rather than fixed.

7 CONCLUSION

We provided the first theoretically rigorous explanation for the intriguing empirical success of using the projection head for self-supervised contrastive learning, supervised contrastive learning, and supervised learning. We demonstrated that lower layers represent features more evenly in linear networks and can represent more features in non-linear networks. This enhances the generalizability and transferability of the representations, especially when downstream-relevant features are weak in the pretraining data or heavily distorted by data augmentations. Interestingly, we also show the benefits when the downstream-relevant features are prominent in the pretraining data. We validated our theoretical findings through extensive experiments on both synthetic and real-world data. Finally, we demonstrate how a fixed reweighting head can achieve performance comparable to the projection head, providing further evidence to support our theoretical conclusions. We also hope that this will offer valuable guidance for future design choices.

Acknowledgements This research is partially supported by the National Science Foundation CAREER Award 2146492.

REFERENCES

- Sanjeev Arora, Nadav Cohen, and Elad Hazan. On the optimization of deep networks: Implicit acceleration by overparameterization. In *International Conference on Machine Learning*, pp. 244–253. PMLR, 2018.
- Philip Bachman, R Devon Hjelm, and William Buchwalter. Learning representations by maximizing mutual information across views. *Advances in neural information processing systems*, 32, 2019.
- Andrei Barbu, David Mayo, Julian Alverio, William Luo, Christopher Wang, Dan Gutfreund, Josh Tenenbaum, and Boris Katz. Objectnet: A large-scale bias-controlled dataset for pushing the limits of object recognition models. *Advances in neural information processing systems*, 32, 2019.
- Adrien Bardes, Jean Ponce, and Yann LeCun. Variance-invariance-covariance regularization for self-supervised learning. *ICLR, Vicreg*, 1:2, 2022.
- Peter L. Bartlett and John Shawe-Taylor. Generalization performance of support vector machines and other pattern classifiers. 1999. URL <https://api.semanticscholar.org/CorpusID:61853586>.
- Florian Bordes, Randall Balestriero, Quentin Garrido, Adrien Bardes, and Pascal Vincent. Guillotine regularization: Why removing layers is needed to improve generalization in self-supervised learning. *Transactions of Machine Learning Research (TMLR)*, 2023.
- Annie S Chen, Yoonho Lee, Amrith Setlur, Sergey Levine, and Chelsea Finn. Project and probe: Sample-efficient adaptation by interpolating orthogonal features. In *The Twelfth International Conference on Learning Representations*, 2023.
- Mayee Chen, Daniel Y Fu, Avaniika Narayan, Michael Zhang, Zhao Song, Kayvon Fatahalian, and Christopher Ré. Perfectly balanced: Improving transfer and robustness of supervised contrastive learning. In *International Conference on Machine Learning*, pp. 3090–3122. PMLR, 2022.
- Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. A simple framework for contrastive learning of visual representations. In *International conference on machine learning*, pp. 1597–1607. PMLR, 2020.
- Ching-Yao Chuang, Joshua Robinson, Yen-Chen Lin, Antonio Torralba, and Stefanie Jegelka. De-biased contrastive learning. *Advances in neural information processing systems*, 33:8765–8775, 2020.
- Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition*, pp. 248–255. Ieee, 2009.
- Aleksandr Ermolov, Aliaksandr Siarohin, Enver Sangineto, and Nicu Sebe. Whitening for self-supervised representation learning. In *International Conference on Machine Learning*, pp. 3015–3024. PMLR, 2021.
- Cong Fang, Hangfeng He, Qi Long, and Weijie J Su. Exploring deep neural networks via layer-peeled model: Minority collapse in imbalanced training. *Proceedings of the National Academy of Sciences*, 118(43):e2103091118, 2021.
- Quentin Garrido, Yubei Chen, Adrien Bardes, Laurent Najman, and Yann Lecun. On the duality between contrastive and non-contrastive self-supervised learning. *arXiv preprint arXiv:2206.02574*, 2022.
- Robert Geirhos, Patricia Rubisch, Claudio Michaelis, Matthias Bethge, Felix A Wichmann, and Wieland Brendel. Imagenet-trained cnns are biased towards texture; increasing shape bias improves accuracy and robustness. *arXiv preprint arXiv:1811.12231*, 2018.

- Florian Graf, Christoph Hofer, Marc Niethammer, and Roland Kwitt. Dissecting supervised contrastive learning. In *International Conference on Machine Learning*, pp. 3821–3830. PMLR, 2021.
- Jean-Bastien Grill, Florian Strub, Florent Alché, Corentin Tallec, Pierre Richemond, Elena Buchatskaya, Carl Doersch, Bernardo Avila Pires, Zhaohan Guo, Mohammad Gheshlaghi Azar, et al. Bootstrap your own latent—a new approach to self-supervised learning. *Advances in neural information processing systems*, 33:21271–21284, 2020.
- Yu Gui, Cong Ma, and Yiqiao Zhong. Unraveling projection heads in contrastive learning: Insights from expansion and shrinkage. *arXiv preprint arXiv:2306.03335*, 2023.
- Suriya Gunasekar, Blake E Woodworth, Srinadh Bhojanapalli, Behnam Neyshabur, and Nati Srebro. Implicit regularization in matrix factorization. *Advances in neural information processing systems*, 30, 2017.
- XY Han, Vardan Papyan, and David L Donoho. Neural collapse under mse loss: Proximity to and dynamics on the central path. *arXiv preprint arXiv:2106.02073*, 2021.
- Jeff Z HaoChen and Tengyu Ma. A theoretical study of inductive biases in contrastive learning. *arXiv preprint arXiv:2211.14699*, 2022.
- Jeff Z HaoChen, Colin Wei, Adrien Gaidon, and Tengyu Ma. Provable guarantees for self-supervised deep learning with spectral contrastive loss. *Advances in Neural Information Processing Systems*, 34:5000–5011, 2021.
- Kaiming He, Haoqi Fan, Yuxin Wu, Saining Xie, and Ross Girshick. Momentum contrast for unsupervised visual representation learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 9729–9738, 2020.
- Dan Hendrycks, Kimin Lee, and Mantas Mazeika. Using pre-training can improve model robustness and uncertainty. In *International conference on machine learning*, pp. 2712–2721. PMLR, 2019.
- Dan Hendrycks, Steven Basart, Norman Mu, Saurav Kadavath, Frank Wang, Evan Dorundo, Rahul Desai, Tyler Zhu, Samyak Parajuli, Mike Guo, et al. The many faces of robustness: A critical analysis of out-of-distribution generalization. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 8340–8349, 2021a.
- Dan Hendrycks, Kevin Zhao, Steven Basart, Jacob Steinhardt, and Dawn Song. Natural adversarial examples, 2021b.
- Like Hui, Mikhail Belkin, and Preetum Nakkiran. Limitations of neural collapse for understanding generalization in deep learning. *arXiv preprint arXiv:2202.08384*, 2022.
- Andrew Ilyas, Shibani Santurkar, Dimitris Tsipras, Logan Engstrom, Brandon Tran, and Aleksander Madry. Adversarial examples are not bugs, they are features. *Advances in neural information processing systems*, 32, 2019.
- Wenlong Ji, Zhun Deng, Ryumei Nakada, James Zou, and Linjun Zhang. The power of contrast for feature learning: A theoretical analysis. *arXiv preprint arXiv:2110.02473*, 2021.
- Li Jing, Pascal Vincent, Yann LeCun, and Yuandong Tian. Understanding dimensional collapse in contrastive self-supervised learning. *arXiv preprint arXiv:2110.09348*, 2021.
- Siddharth Joshi and Baharan Mirzasoleiman. Data-efficient contrastive self-supervised learning: Most beneficial examples for supervised learning contribute the least. In Andreas Krause, Emma Brunskill, Kyunghyun Cho, Barbara Engelhardt, Sivan Sabato, and Jonathan Scarlett (eds.), *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pp. 15356–15370. PMLR, 23–29 Jul 2023. URL <https://proceedings.mlr.press/v202/joshi23b.html>.
- Siddharth Joshi, Yu Yang, Yihao Xue, Wenhan Yang, and Baharan Mirzasoleiman. Towards mitigating spurious correlations in the wild: A benchmark and a more realistic dataset, 2023.

- Prannay Khosla, Piotr Teterwak, Chen Wang, Aaron Sarna, Yonglong Tian, Phillip Isola, Aaron Maschinot, Ce Liu, and Dilip Krishnan. Supervised contrastive learning. *Advances in neural information processing systems*, 33:18661–18673, 2020.
- Diederik P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, 2014.
- Polina Kirichenko, Pavel Izmailov, and Andrew Gordon Wilson. Last layer re-training is sufficient for robustness to spurious correlations. *arXiv preprint arXiv:2204.02937*, 2022.
- Pang Wei Koh, Shiori Sagawa, Henrik Marklund, Sang Michael Xie, Marvin Zhang, Akshay Bal-subramani, Weihua Hu, Michihiro Yasunaga, Richard Lanus Phillips, Irena Gao, et al. Wilds: A benchmark of in-the-wild distribution shifts. In *International Conference on Machine Learning*, pp. 5637–5664. PMLR, 2021.
- Alexander Kolesnikov, Xiaohua Zhai, and Lucas Beyer. Revisiting self-supervised visual representation learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 1920–1929, 2019.
- Alex Krizhevsky, Geoffrey Hinton, et al. Learning multiple layers of features from tiny images. 2009.
- Yann LeCun. The mnist database of handwritten digits. <http://yann.lecun.com/exdb/mnist/>, 1998.
- Zhiheng Li, Ivan Evtimov, Albert Gordo, Caner Hazirbas, Tal Hassner, Cristian Canton Ferrer, Chenliang Xu, and Mark Ibrahim. A whac-a-mole dilemma: Shortcuts come in multiples where mitigating one amplifies others. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 20071–20082, 2023.
- Hong Liu, Jeff Z HaoChen, Adrien Gaidon, and Tengyu Ma. Self-supervised learning is more robust to dataset imbalance. *arXiv preprint arXiv:2110.05025*, 2021.
- Jianfeng Lu and Stefan Steinerberger. Neural collapse under cross-entropy loss. *Applied and Computational Harmonic Analysis*, 59:224–241, 2022.
- Raghav Mehta, Vítor Albiero, Li Chen, Ivan Evtimov, Tamar Glaser, Zhiheng Li, and Tal Hassner. You only need a good embeddings extractor to fix spurious correlations. *arXiv preprint arXiv:2212.06254*, 2022.
- Ryumei Nakada, Halil Ibrahim Gulluk, Zhun Deng, Wenlong Ji, James Zou, and Linjun Zhang. Understanding multimodal contrastive learning and incorporating unpaired data. In *International Conference on Artificial Intelligence and Statistics*, pp. 4348–4380. PMLR, 2023.
- Behnam Neyshabur, Ryota Tomioka, and Nathan Srebro. In search of the real inductive bias: On the role of implicit regularization in deep learning. *arXiv preprint arXiv:1412.6614*, 2014.
- Aaron van den Oord, Yazhe Li, and Oriol Vinyals. Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748*, 2018.
- Vardan Pappayan, XY Han, and David L Donoho. Prevalence of neural collapse during the terminal phase of deep learning training. *Proceedings of the National Academy of Sciences*, 117(40): 24652–24663, 2020.
- Benjamin Recht, Rebecca Roelofs, Ludwig Schmidt, and Vaishaal Shankar. Do imagenet classifiers generalize to imagenet? In *International conference on machine learning*, pp. 5389–5400. PMLR, 2019.
- Elan Rosenfeld, Pradeep Ravikumar, and Andrej Risteski. Domain-adjusted regression or: Erm may already learn features sufficient for out-of-distribution generalization. *arXiv preprint arXiv:2202.06856*, 2022.
- Shiori Sagawa, Pang Wei Koh, Tatsunori B Hashimoto, and Percy Liang. Distributionally robust neural networks for group shifts: On the importance of regularization for worst-case generalization. *arXiv preprint arXiv:1911.08731*, 2019.

- Shiori Sagawa, Aditi Raghunathan, Pang Wei Koh, and Percy Liang. An investigation of why overparameterization exacerbates spurious correlations. In *International Conference on Machine Learning*, pp. 8346–8356. PMLR, 2020.
- Nikunj Saunshi, Jordan Ash, Surbhi Goel, Dipendra Misra, Cyril Zhang, Sanjeev Arora, Sham Kakade, and Akshay Krishnamurthy. Understanding contrastive learning requires incorporating inductive biases. *arXiv preprint arXiv:2202.14037*, 2022.
- Vaishaal Shankar, Achal Dave, Rebecca Roelofs, Deva Ramanan, Benjamin Recht, and Ludwig Schmidt. Do image classifiers generalize across time? In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 9661–9669, 2021.
- Daniel Soudry, Elad Hoffer, Mor Shpigel Nacson, Suriya Gunasekar, and Nathan Srebro. The implicit bias of gradient descent on separable data. *The Journal of Machine Learning Research*, 19(1): 2822–2878, 2018.
- Rohan Taori, Achal Dave, Vaishaal Shankar, Nicholas Carlini, Benjamin Recht, and Ludwig Schmidt. Measuring robustness to natural distribution shifts in image classification. *Advances in Neural Information Processing Systems*, 33:18583–18599, 2020.
- Yuandong Tian, Xinlei Chen, and Surya Ganguli. Understanding self-supervised learning dynamics without contrastive pairs. In *International Conference on Machine Learning*, pp. 10268–10278. PMLR, 2021.
- Xiang Wang, Xinlei Chen, Simon S Du, and Yuandong Tian. Towards demystifying representation learning with non-contrastive self-supervision. *arXiv preprint arXiv:2110.04947*, 2021.
- Zixin Wen and Yuanzhi Li. The mechanism of prediction head in non-contrastive self-supervised learning. *Advances in Neural Information Processing Systems*, 35:24794–24809, 2022.
- Kai Xiao, Logan Engstrom, Andrew Ilyas, and Aleksander Madry. Noise or signal: The role of image backgrounds in object recognition. *arXiv preprint arXiv:2006.09994*, 2020.
- Yihao Xue, Kyle Whitecross, and Baharan Mirzasoleiman. Investigating why contrastive learning benefits robustness against label noise. In *International Conference on Machine Learning*, pp. 24851–24871. PMLR, 2022.
- Yihao Xue, Siddharth Joshi, Eric Gan, Pin-Yu Chen, and Baharan Mirzasoleiman. Which features are learnt by contrastive learning? on the role of simplicity bias in class collapse and feature suppression. *arXiv preprint arXiv:2305.16536*, 2023.
- Mang Ye, Xu Zhang, Pong C Yuen, and Shih-Fu Chang. Unsupervised embedding learning via invariant and spreading instance feature. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 6210–6219, 2019.
- Chun-Hsiao Yeh, Cheng-Yao Hong, Yen-Chi Hsu, Tyng-Luh Liu, Yubei Chen, and Yann LeCun. Decoupled contrastive learning. In *European Conference on Computer Vision*, pp. 668–684. Springer, 2022.
- Jure Zbontar, Li Jing, Ishan Misra, Yann LeCun, and Stéphane Deny. Barlow twins: Self-supervised learning via redundancy reduction. In *International Conference on Machine Learning*, pp. 12310–12320. PMLR, 2021.
- Jinxin Zhou, Xiao Li, Tianyu Ding, Chong You, Qing Qu, and Zhihui Zhu. On the optimization landscape of neural collapse under mse loss: Global optimality with unconstrained features. In *International Conference on Machine Learning*, pp. 27179–27202. PMLR, 2022a.
- Jinxin Zhou, Chong You, Xiao Li, Kangning Liu, Sheng Liu, Qing Qu, and Zhihui Zhu. Are all losses created equal: A neural collapse perspective. *arXiv preprint arXiv:2210.02192*, 2022b.
- Zhihui Zhu, Tianyu Ding, Jinxin Zhou, Xiao Li, Chong You, Jeremias Sulam, and Qing Qu. A geometric analysis of neural collapse with unconstrained features. *Advances in Neural Information Processing Systems*, 34:29820–29834, 2021.
- Zhuotun Zhu, Lingxi Xie, and Alan L Yuille. Object recognition with and without objects. *arXiv preprint arXiv:1611.06596*, 2016.